

# FlameHawk<sup>®</sup> Flame Detector

*Forney's FlameHawk<sup>®</sup> fiber optic flame detector is a dual channel solid-state device designed for industrial and marine gas turbines.*

## Product Overview


The FlameHawk<sup>®</sup> fiber optic flame detector is a dual channel solid-state device designed for direct replacement of Geiger-Mueller (GM) tube flame sensors used on industrial and marine gas turbine engines.

The FlameHawk flame detector improves performance and reduces maintenance costs. It has durable fiber optic cables that transmit the spectral energy from the combustion process to the electronics module. This allows for remote mounting of the electronics outside of the engine enclosure, which eliminates complicated and costly cooling systems common in other flame sensors.

The FlameHawk flame detector system works in low NOx combustors, multiple fuel applications and with systems incorporating steam injection.

### Operational Principles

The fiber optic cables and optical probes offer easy installation and maintainability. Simple threaded connections are used throughout the system to allow for rapid installation without the need for special tooling. Unique features, such as a quick-release clamp on the frame engine optical probe, have been incorporated to ease cleaning and inspection.

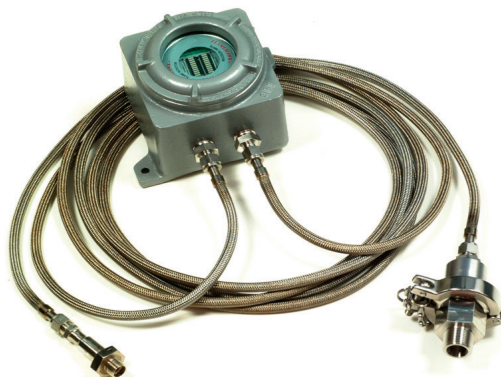

## Features & Benefits

- Mechanically and electronically interchangeable with other flame sensors
- Remote mounting of electronics
- Optical probe mounts directly to engine
- No external cooling required
- Dual channel — easy installation and less wiring
- Multiple fiber optic cable lengths available
- Quick disconnect clamp allows for easy cleaning of adapter lens
- Low voltage operation
- Multiple field configurable outputs: relay, 4-20 mA, 4-20 mA loop
- Signal strength meter provides visual indication of system health
- Reliable operation when using gas or liquid fuel
- Proven operation in steam injection applications
- Industrial boiler flame, auto-ignition and flashback detection

# FlameHawk® Flame Detector

Pub # 404005-31  
Rev 06/2017

## Model 705 Series

### Products and Accessories:

00705-0225-0003	Amplifier, with Cable Connector	00705-0192-0120	10' (3.05m) F/O Light Guide Top Assembly
00705-0225-0004	Amplifier, without Cable Connector	00705-0192-0180	15' (4.57m) F/O Light Guide Top Assembly
00705-0225-0005	Amplifier, with Connector, Unfiltered	00705-0192-0300	25' (7.62m) F/O Light Guide Top Assembly
00705-0225-0006	Amplifier, without Connector, Unfiltered	00705-0192-0480	40' (12.2m) F/O Light Guide Top Assembly
00705-0225-0009	Amplifier, ATEX, IECEx Approved	00705-0258-0001	Replacement Quartz Lens Assembly
00705-0242-0001	Cable, Interface		
00705-0185-0001	Aeroderivative Sight Tube, Inconel/Sapphire		
00705-0212-0001	Coupling Mounted Frame Application Sight Tube, 316 SST, Quartz		
00705-0213-0001	Coupling Mounted Frame Application Sight Tube, 316 SST, Quartz, with Offset		
00705-0239-0001	Flange Mounted Frame Application Sight Tube, 316 SST, Quartz		

## General Specifications

### Electronics Module Performance

Sensitivity:	Calibrated with 1µW radiance (@ 370 nm) Correlates to Relay Switch Point or 7.0 mA
Response Time (On / Off)	Less than 50 milliseconds

### Electrical

4-20 mA and Relay Using Signal Strength Meter	18 to 32 VDC @ > 50 mA, 4-20 mA and relay. May be operated simultaneously
4-20 mA Max. Load	<650 ohms at 18 VDC to 1350 ohms at 32 VDC (linear)
4-20 mA Loop Powered	18 to 32 VDC with 4 mA headroom
Relay Rating	Resistive: 1A @ 30 VDC Load: 0.5A @ 125 VDC

### Mechanical

Enclosure Material	Aluminum, epoxy painted
Optical Interface	Female 3/8" compression-style fitting
Electrical Interface	MS38999 / 20WD97PN or 3/4" NPT conduit hole ATEX/IECEX version - 3/4" NPT conduit hole only for ATEX gland
Enclosure Mounting	5/16" (7.9mm) diameter holes (2x)
Weight	6 lbs (2.7 kg)
Enclosure Certifications	Class I, Div. 1 & 2, Groups B, C & D NEMA 3, 4, 4X, 7 (B, C, D), 9 (E, F, G) CENELEC — EEx d IIC, T6 or T5
ATEX/IECEX certification #:	FM16ATEX0035X/ IECEx FMG 16.0025X

### Environmental

Operating Temperature	-22°F to 158°F (-30°C to 70°C)
Vibration	8g over a range of 5 to 1200Hz
Humidity	0 to 100% relative humidity

### Agency Approvals

ATEX/IECEX version  
Part #00705-0225-0009



II 3 G

Ex db ec IIB + H2 T6 Gc  
-30°C ≤ T<sub>AMB</sub> ≤ +70 °C

## Fiber Optic Cables

### Mechanical

External Sheath Material	316 Stainless steel (dual layer)
Fiber Material	Fused silica — UV enhanced
Optical Interface Probe	3/8" compression-style fitting
Bend Radius	4" (101.6 mm) minimum

### Environmental

Temperature Range	-40°F to 662°F (-40°C to 350°C)
-------------------	---------------------------------

## Optical Probe -Aeroderivative

### Mechanical

Material	Inconel 625
Engine Interface	5/8-18 UNF external thread
Fiber Optic Interface	3/8" compression-style fitting
Window Material	Sapphire

### Environmental

Temperature Range	-40°F to 1095°F (-40°C to 590°C)
Maximum Pressure	6895 kPa (1000 psi)

## Optical Probe -Frame

### Mechanical

Material	316 stainless steel
Engine Interface	3/4" NPT external thread or flange mount
Fiber Optic Interface	3/8" compression-style fitting
Window Material	Quartz
Purge Port	1/8" NPT (if needed)

### Environmental

Temperature Range	-40°F to 572°F (-40°C to 300°C)
Maximum Pressure	4137 kPa (600 psi)

Forney Corporation

16479 N. Dallas Parkway, Suite 600 • Addison, TX 75001  
800-356-7740 • Fax 972-458-6650 • www.forneycorp.com